

TOPCon Bifacial
132 - cell Module

TW-620HT-02 Full Black

600-620W


0-3%Positive Tolerance



Monocrystalline




Half Cell



16BB



Grade A

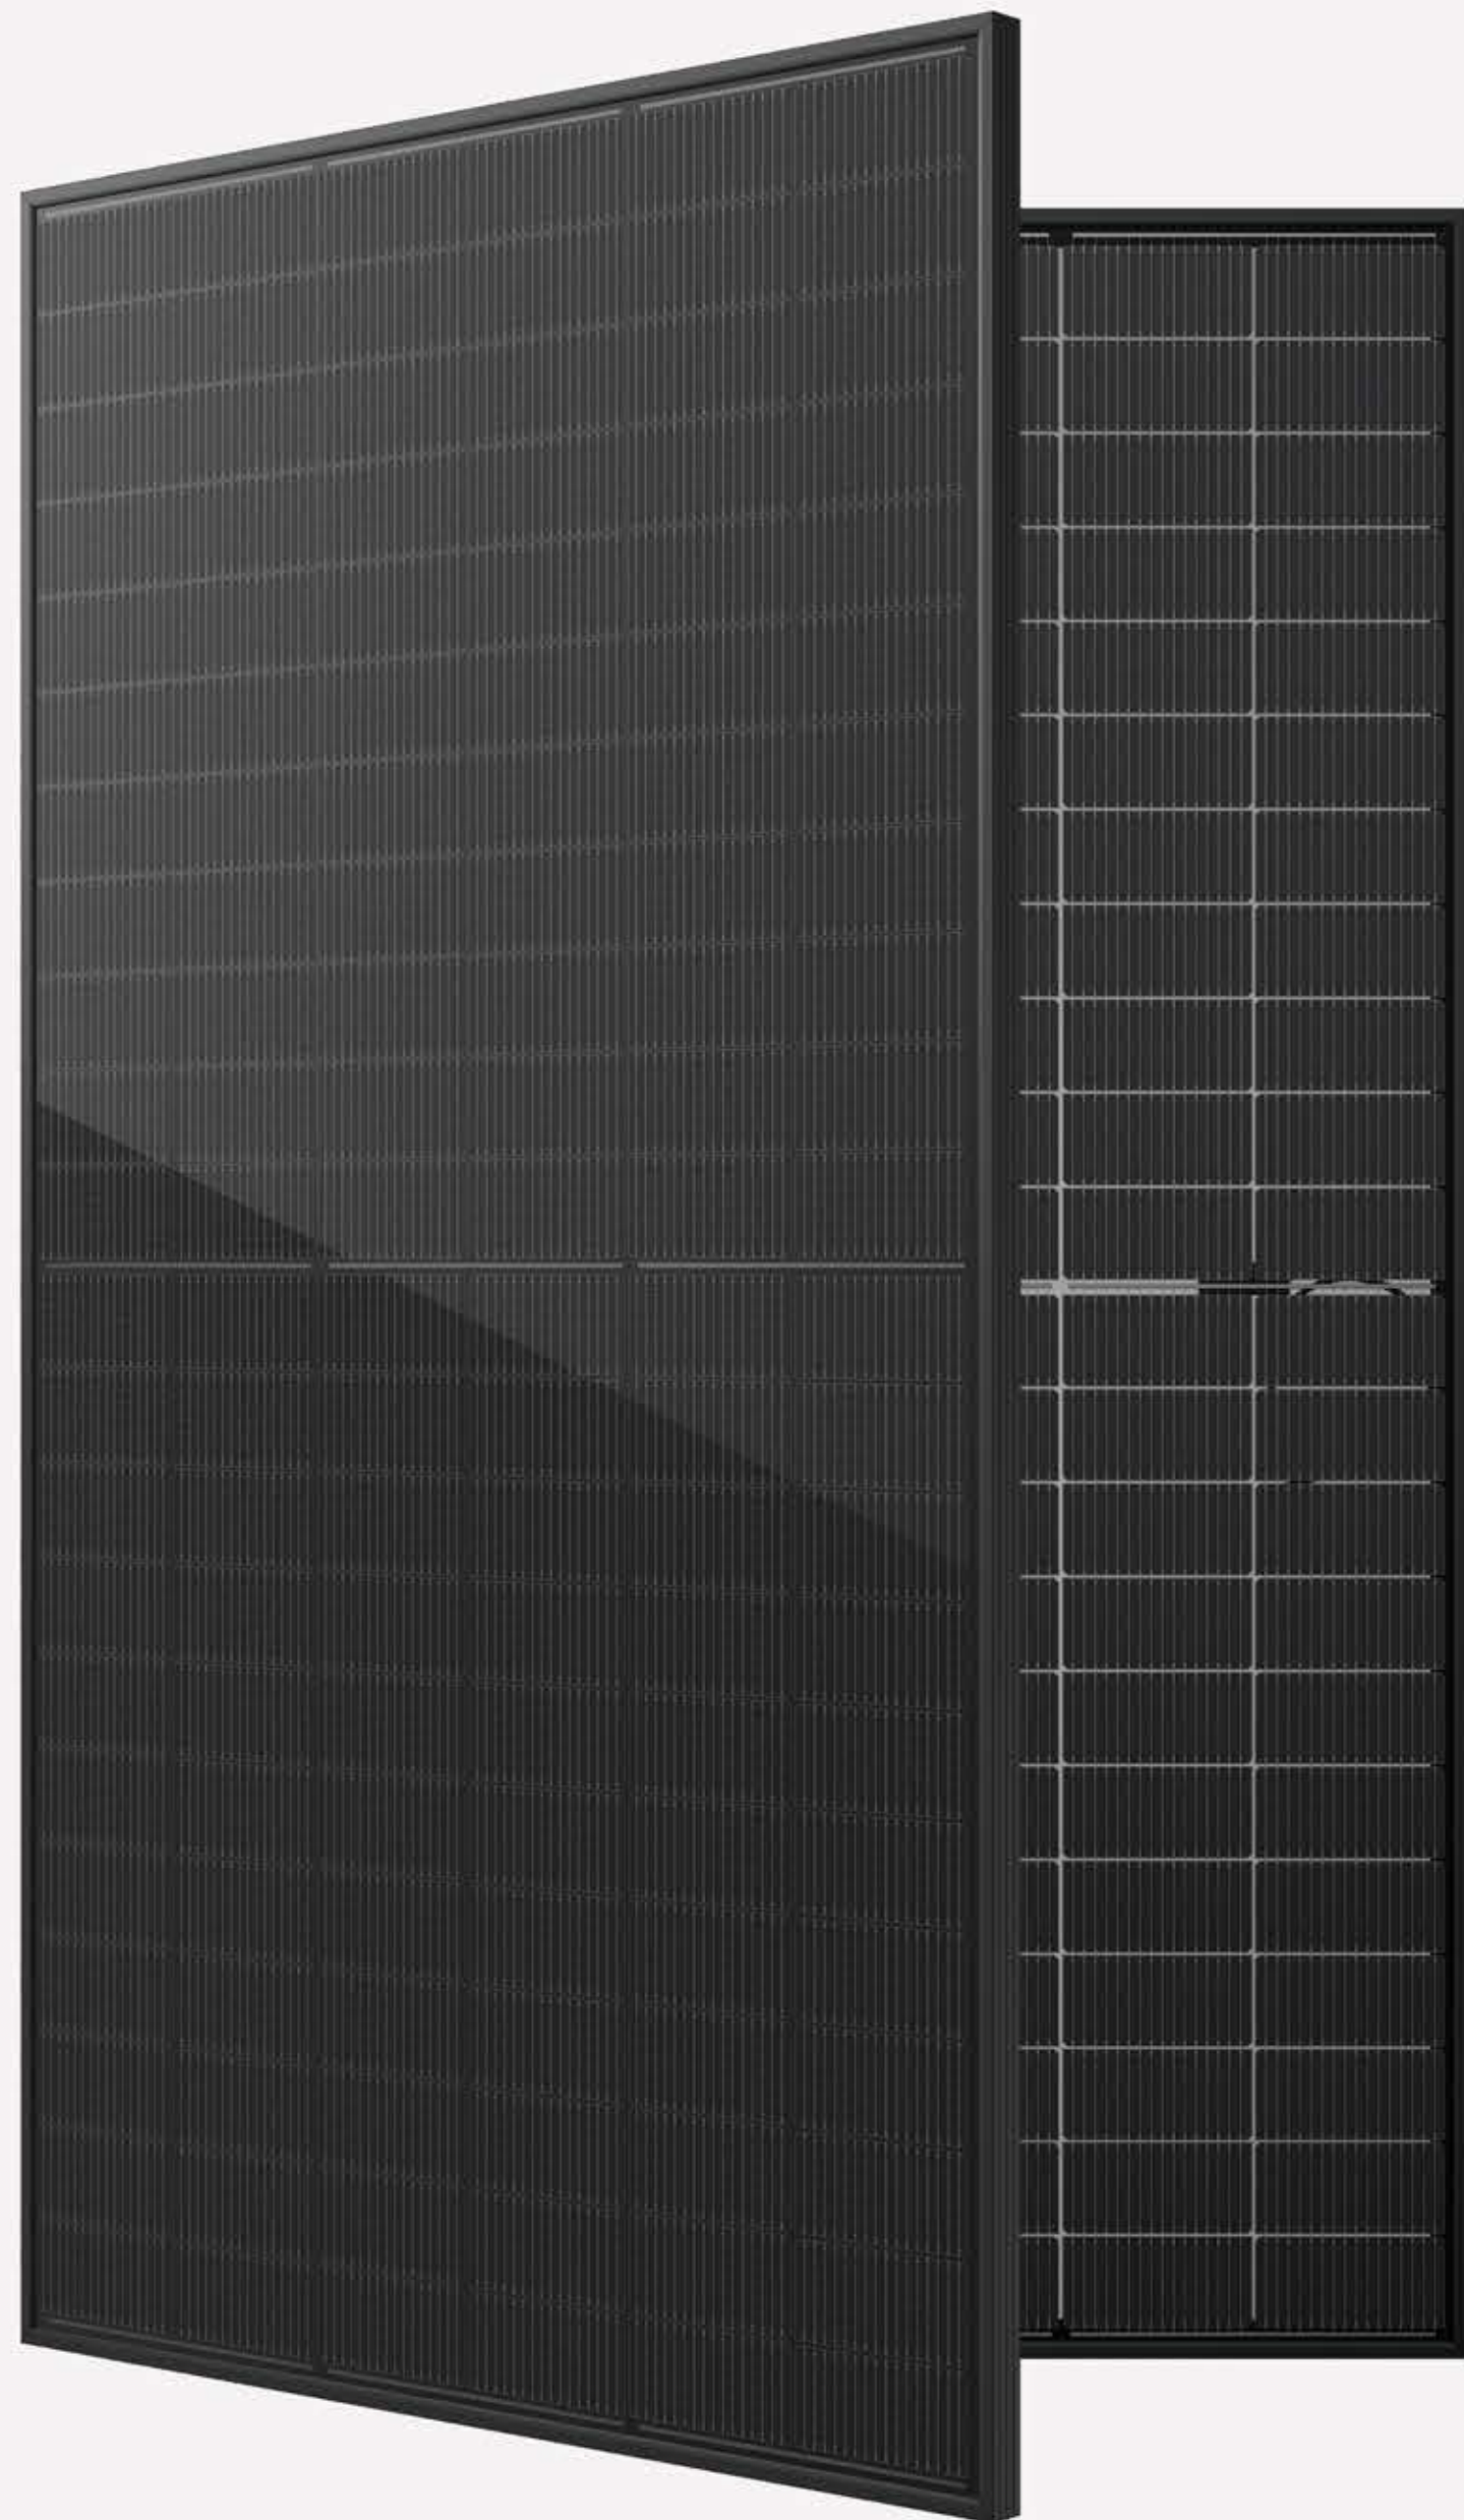

• MODULE FEATURES



High efficiency

TOPCon technology improves efficiency, increases power generation, and contributes to lower LCOE.



Lower heat spot risk

Innovative circuit design and “Half Cell” structure decrease the temperature of heat spots and effectively reduce power loss.



Excellent low-light performance

Reliable performance in low-light conditions such as in the morning, at dusk or during raining days.



Resilient to extreme weather

Carefully selected materials ensure the module still works well under the condition of 2400Pa wind load and 5400Pa snow load.



PID resistant

High quality solar cell and advanced processing technology contribute to excellent PID resistance performance.



Double-sided electricity generation

Power can be generated on both sides to support additional output gains of up to 25%. The multi-busbar half-cut technology can boost energy density to deliver higher output.


• Quality Certification



• Product Qualification



• Performance Warranty

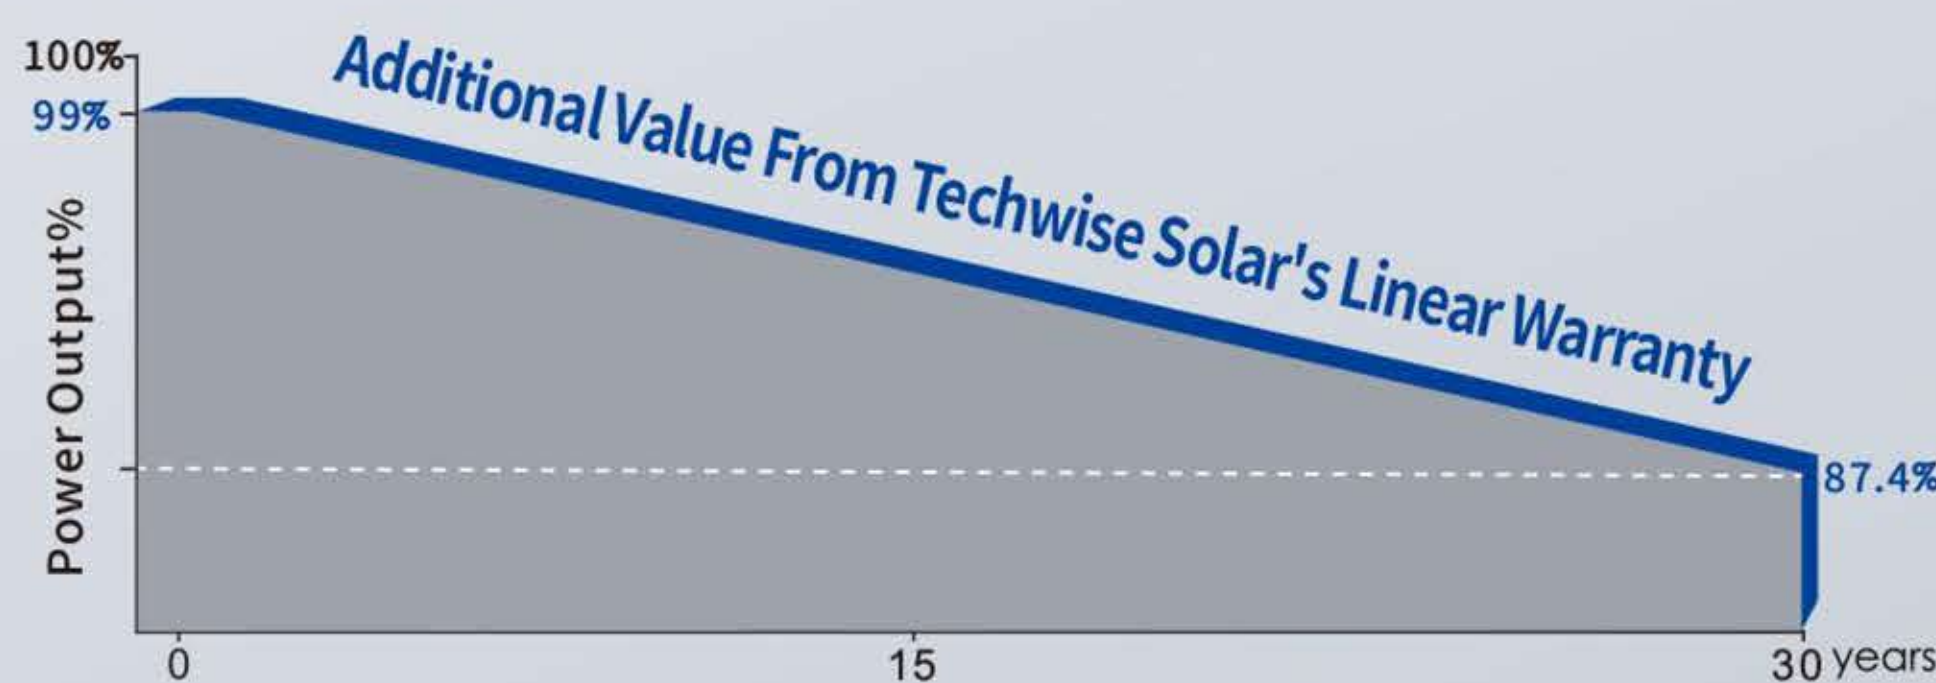

15 15 Years Product Warranty

30 30 Years Linear Power Warranty

TY-620HT-02

• Product Specification •

Cell Type	Mono crystalline
Cell Quantity	132 cell
Cell Size (mm)	182*105
Module Size (mm)	2382*1134*30
Module Weight (kg)	32.5
Glass Thickness (mm)	2.0
Frame Material	Anodized aluminum alloy
Junction Box	IP68
Cable/Connector	4mm ² , MC4compatible
Cable Length	+300mm/-300mm; or Customize
Max System Volt (V)	1500V DC
Max Fuse Rate (A)	30
Power Tolerance	0~+3%
Refer. Bifacial Factor	80±10%

• Electrical Characteristics •

STC standard performance >>>

Power Level	600	605	610	615	620
Pmax(W)	600	605	610	615	620
Vmp(V)	39.81	40.01	40.21	40.41	40.60
Imp(A)	15.07	15.12	15.17	15.22	15.27
Voc(V)	47.43	47.65	47.88	48.10	48.32
Isc(A)	16.01	16.07	16.13	16.19	16.24
Module Efficiency (%)	22.21	22.40	22.58	22.77	22.95

NOCT standard performance >>>

Power Level	600	605	610	615	620
Pmax(W)	454	457	461	465	469
Vmp(V)	37.62	37.81	38.00	38.19	38.37
Imp(A)	12.06	12.10	12.14	12.18	12.22
Voc(V)	45.06	45.27	45.48	45.70	45.90
Isc(A)	12.81	12.86	12.90	12.95	12.99

STC: Irradiance 1000W/m², Module Temperature 25°C, AM1.5

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s

• Electrical Characteristics At BNPI •


Pmax(W)	661	667	673	678	684
Voc(V)	47.43	47.65	47.88	48.10	48.32
Isc(A/135)	17.65	17.72	17.78	17.85	17.91
Vmp(V)	39.81	40.01	40.21	40.41	40.60
Imp(A)	16.62	16.67	16.73	16.78	16.84
Isc(A/300)	19.66	19.73	19.80	19.88	19.95

BNPI: Rear Irradiance 135W/m², Bifaciality coefficient 80%±5%



• Temperature Characteristics •

Operating Temp (°C)	-40~85
Operating Humidity (%)	5~85
Hail Load Tolerance	25mm hailstone with velocity of 23m/s
Temp Coefficient (P _{max})/°C	-0.30
Temp Coefficient I _{sc} (%/°C)	0.04
Temp Coefficient V _{oc} (%/°C)	-0.25
Operating Temp (°C)	44±2

• Engineering Drawings •

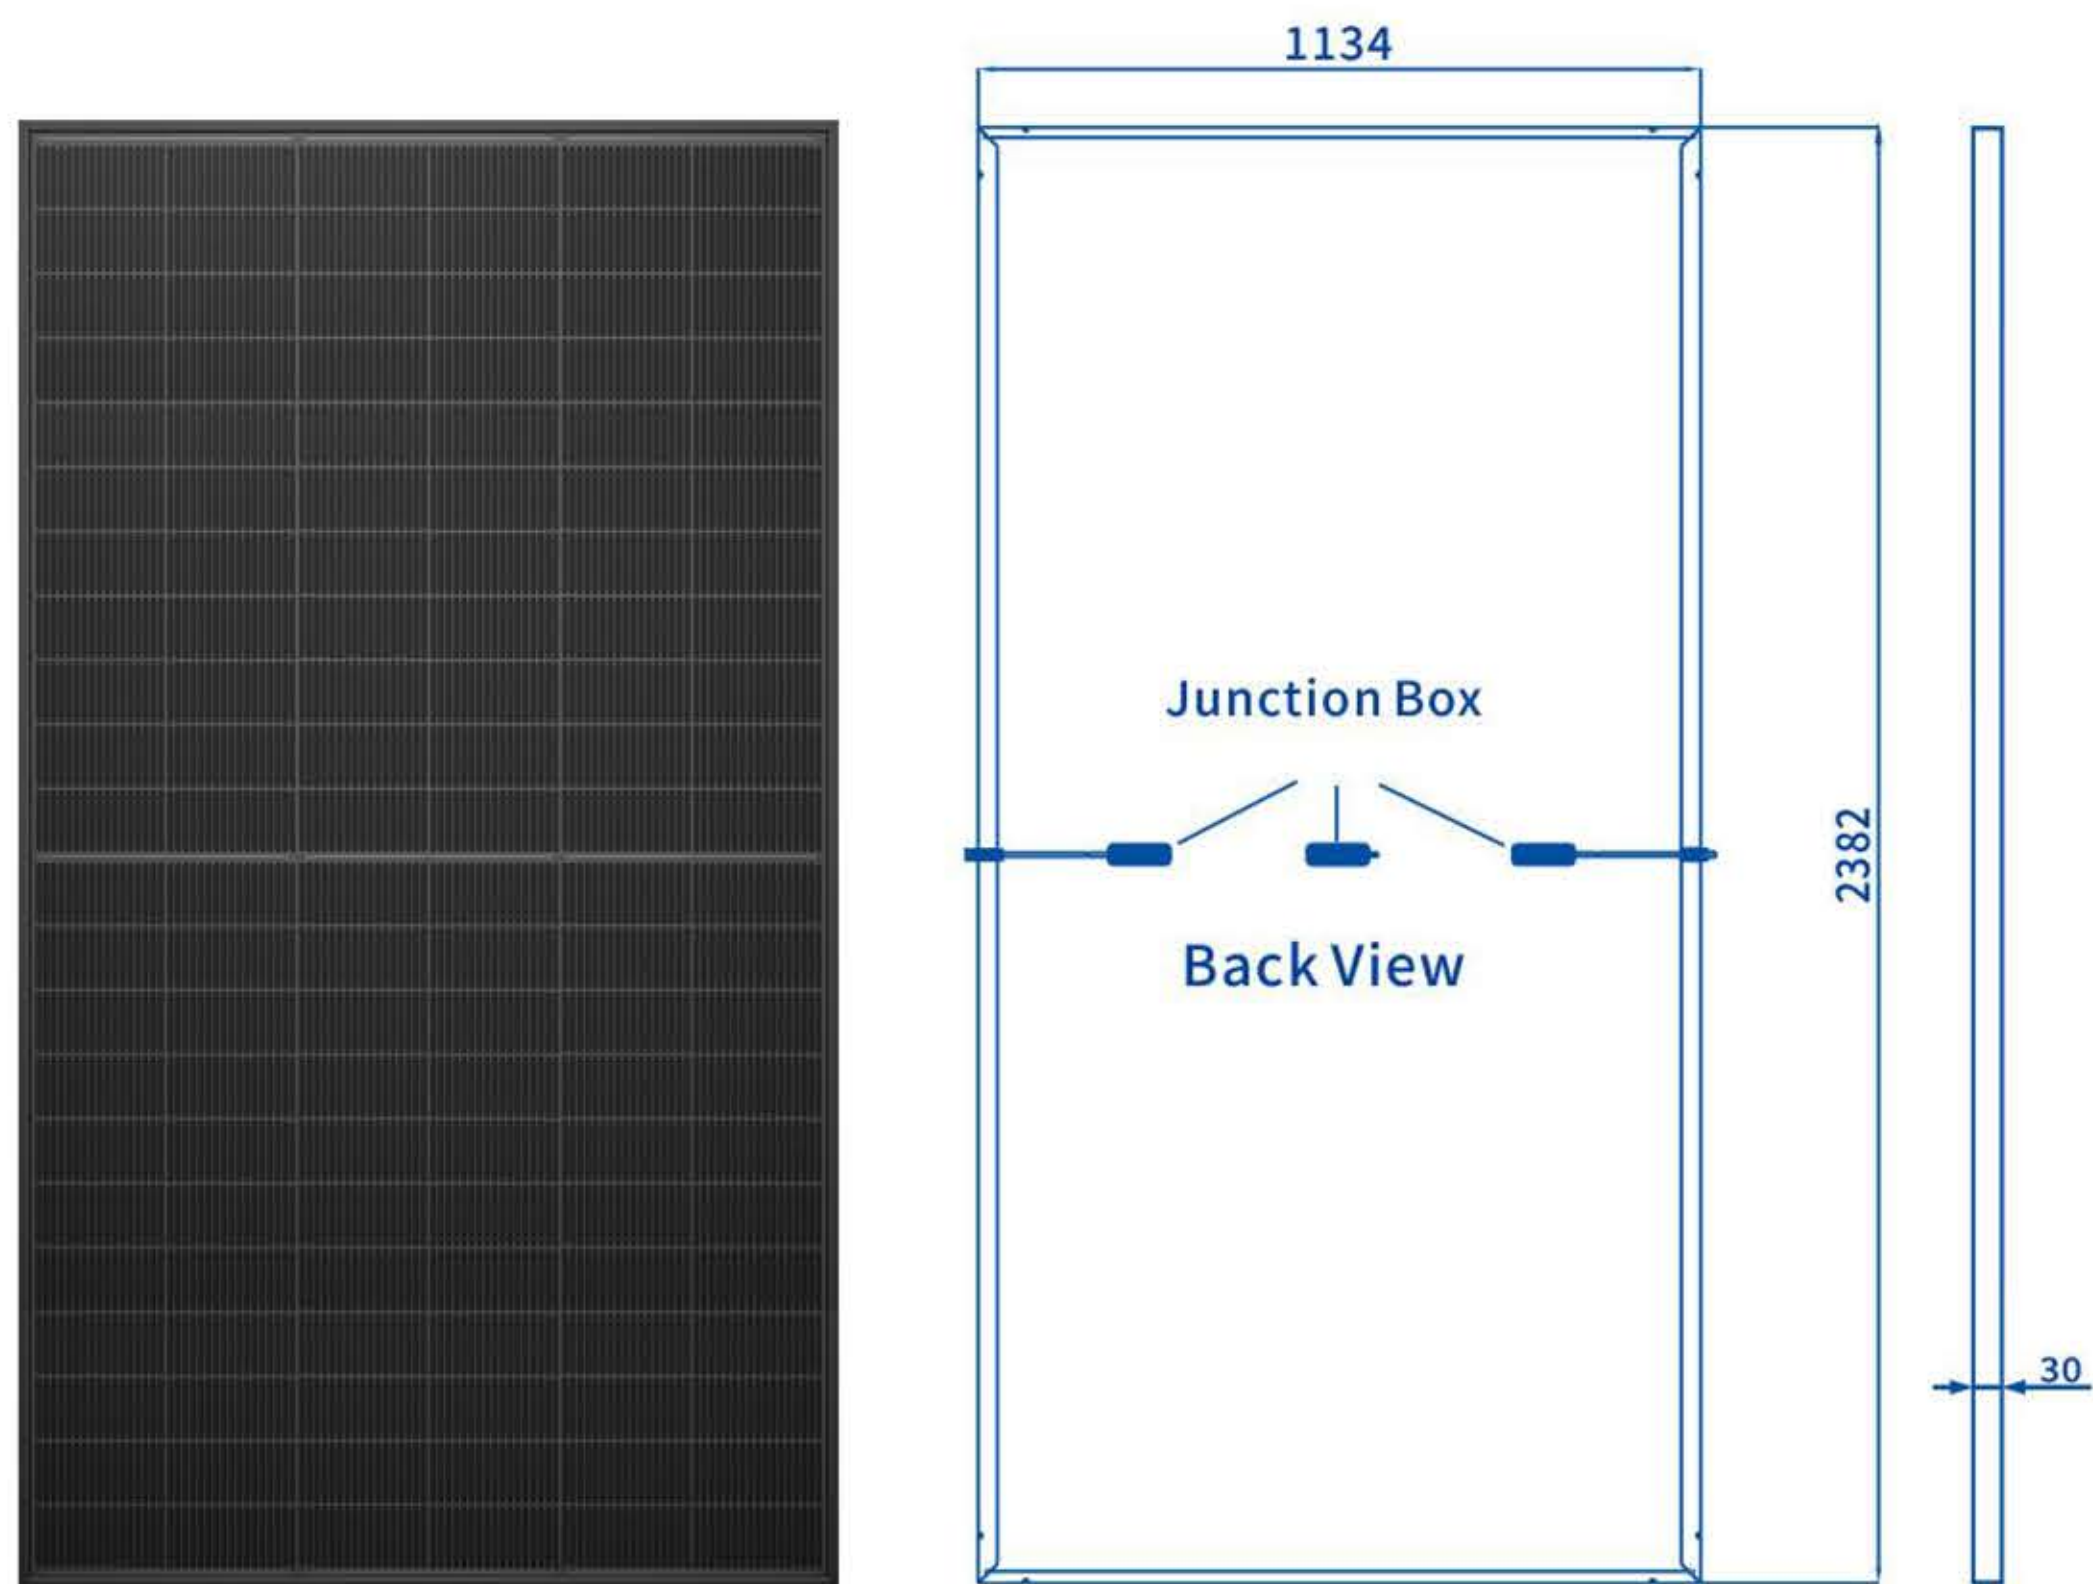

• I-V Curve •

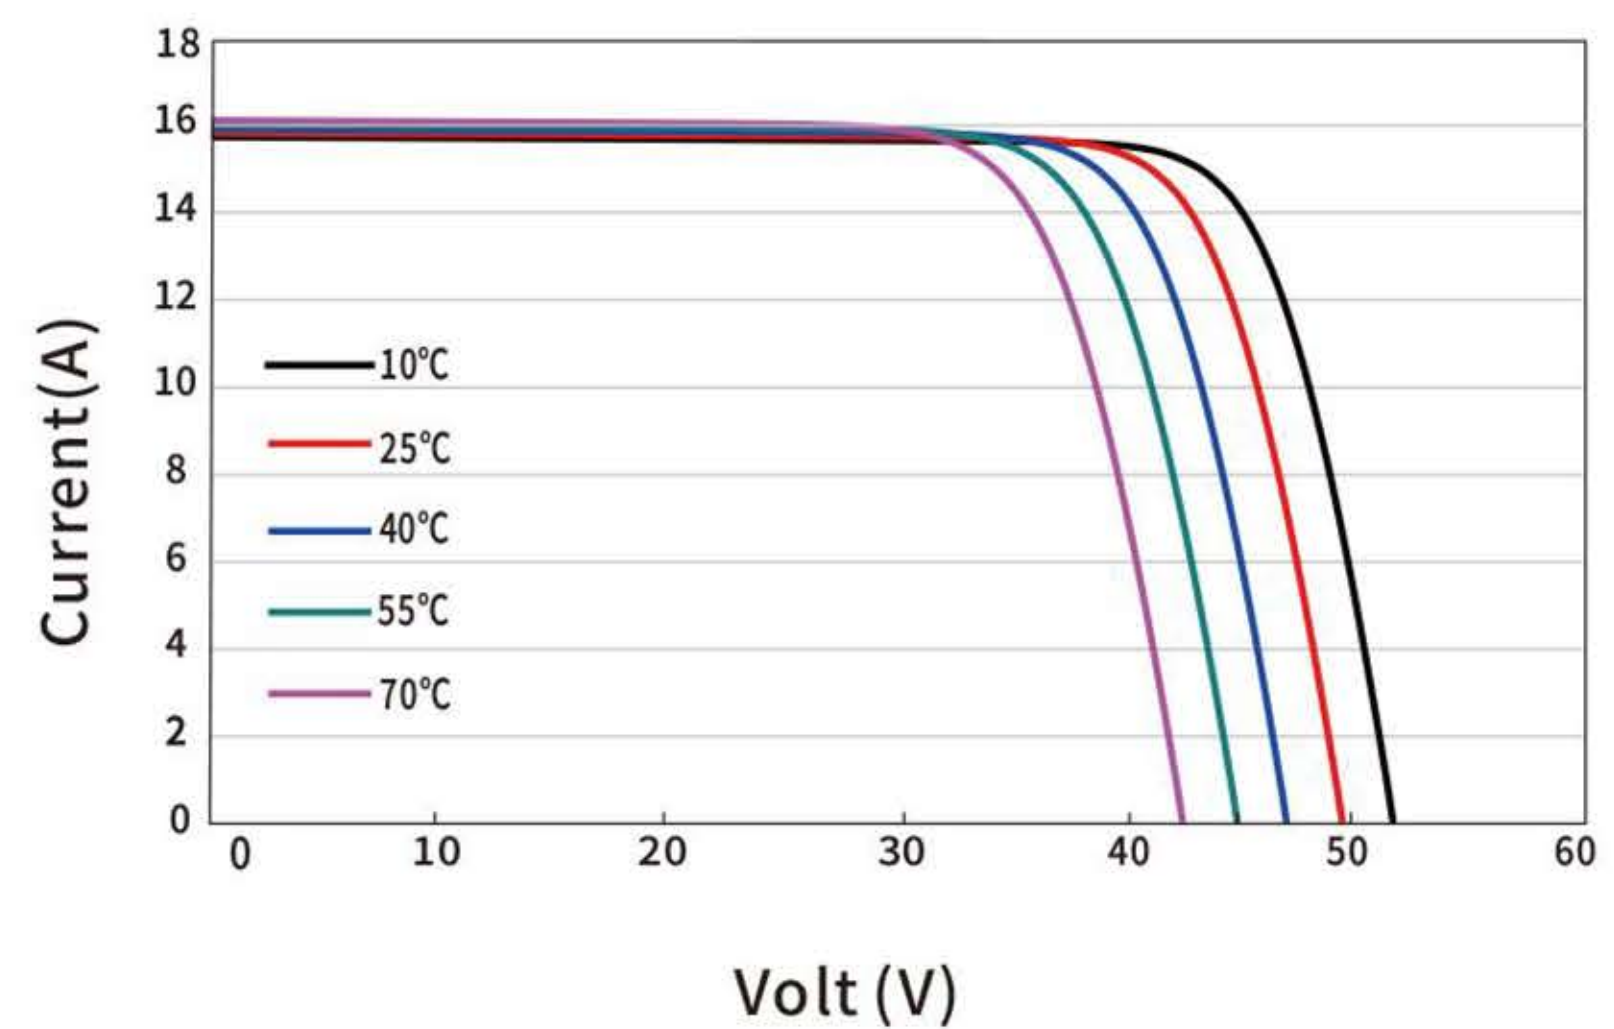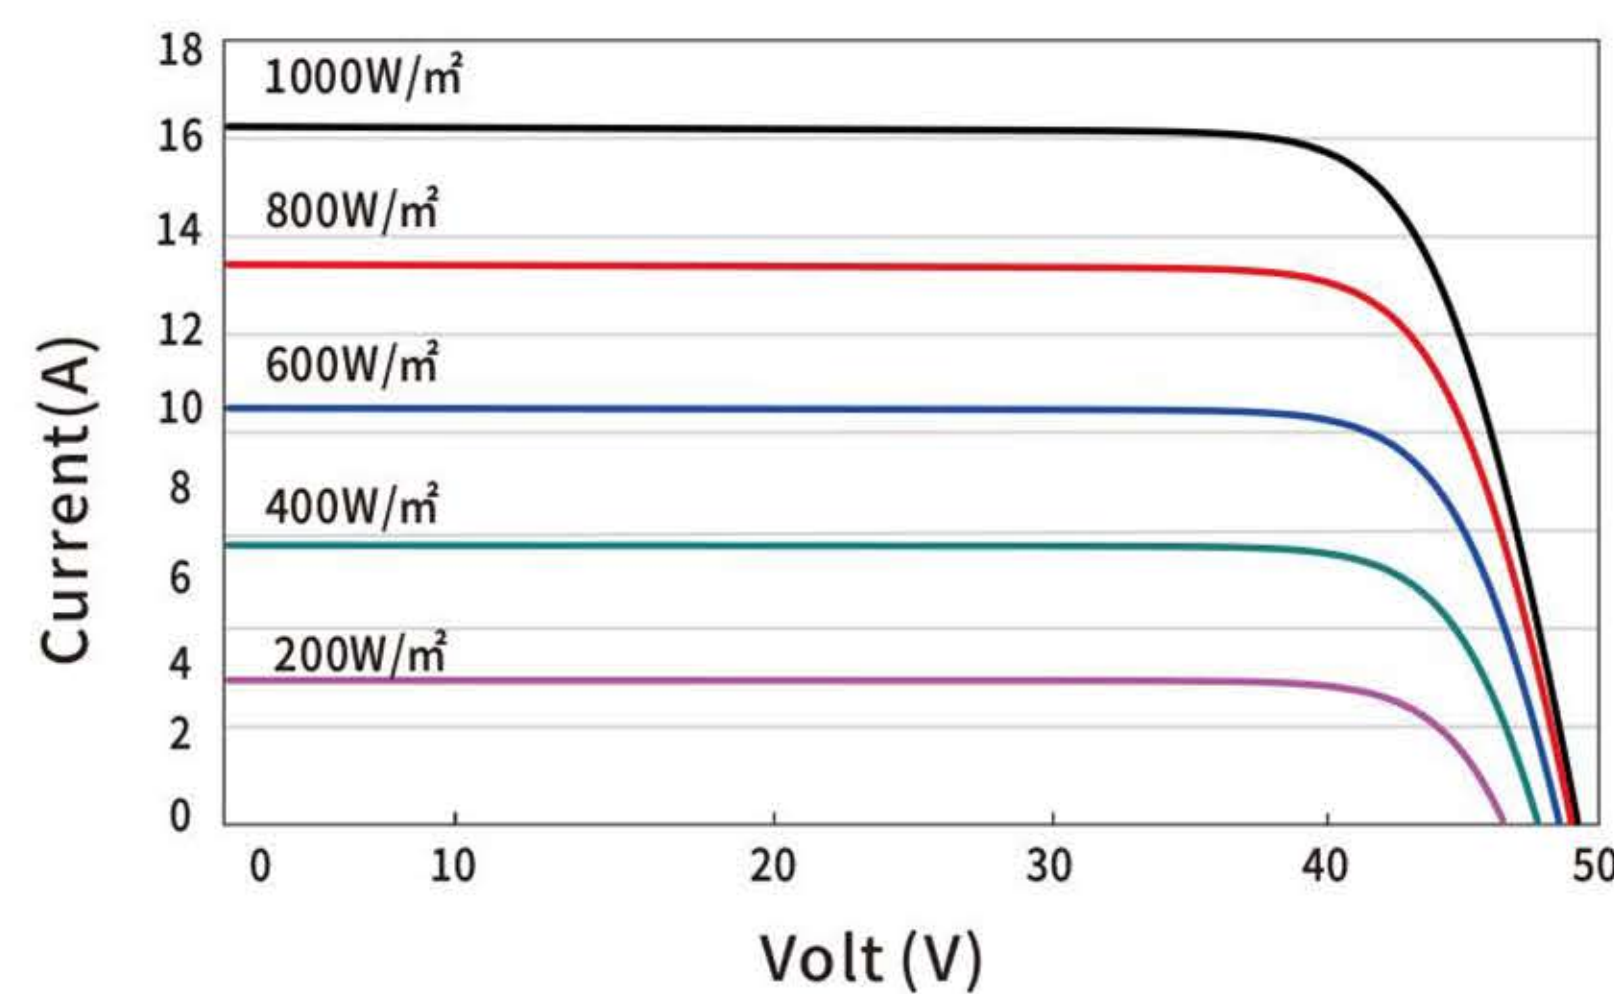

• Packaging Info •

Pieces per Pallet	37
Size of Packaging (mm)	2396*1125*1270
Weight of per Pallet (kg)	1228
Pieces per Container	740
Size of Container	40'HC